

# 230DRAS1MI

## South Australia Meter Box

Technical Data Sheet

Unmatched flexibility, fully compliant!



Exterior meter boxes act as an enclosure for your customers' circuit protection products. They offer protection, while providing easy access to electrical equipment during maintenance.


The Clipsal South Australia Meter Box has been designed with safety and security in mind. The combination of a wide access panel meter enclosure, a meter isolator and generous wiring room offer the perfect solution for domestic outdoor locations.


### Reference:

230DRAS1MI: 24 Module switchboard and single meter box, complete with 1P meter isolator (MCB 63A)

### Features and benefits:

- Galvanised steel meter box
- Powder coating - neutral painted finish to blend into existing decor
- 24 Modules of full DIN.
- Neutral and Earth Bar Grid Assembly provided.
  - 1 x 35mm<sup>2</sup> / 11 x 10mm<sup>2</sup> Earth
  - 4 x 25mm<sup>2</sup> / 4 x 10mm<sup>2</sup> Neutral
  - 2 x 35mm<sup>2</sup> / 7 x 10mm<sup>2</sup> RCD Neutral
  - 1 x 35mm<sup>2</sup> / 6 x 10mm<sup>2</sup> RCD Neutral
- Includes sliding bracket and lead tie-off point to suits temporary and permanent installations.
- Door retaining strap to keep door open, for convenience during installation and maintenance
- Lockable door
- Ingress Protection rating of IP23
- Includes a one-phase meter isolator
- Approved by the state's supply authority, SA Power Network

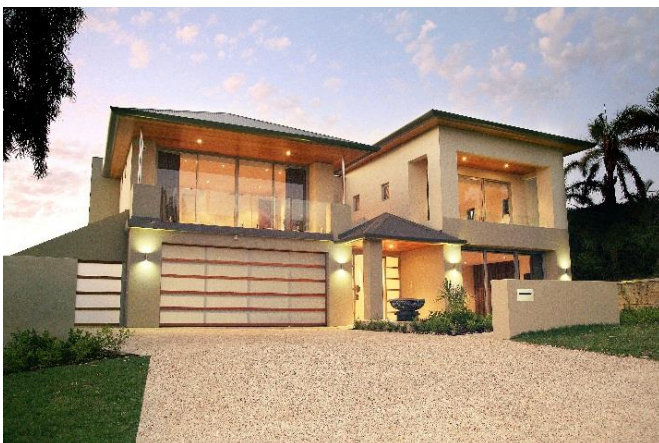

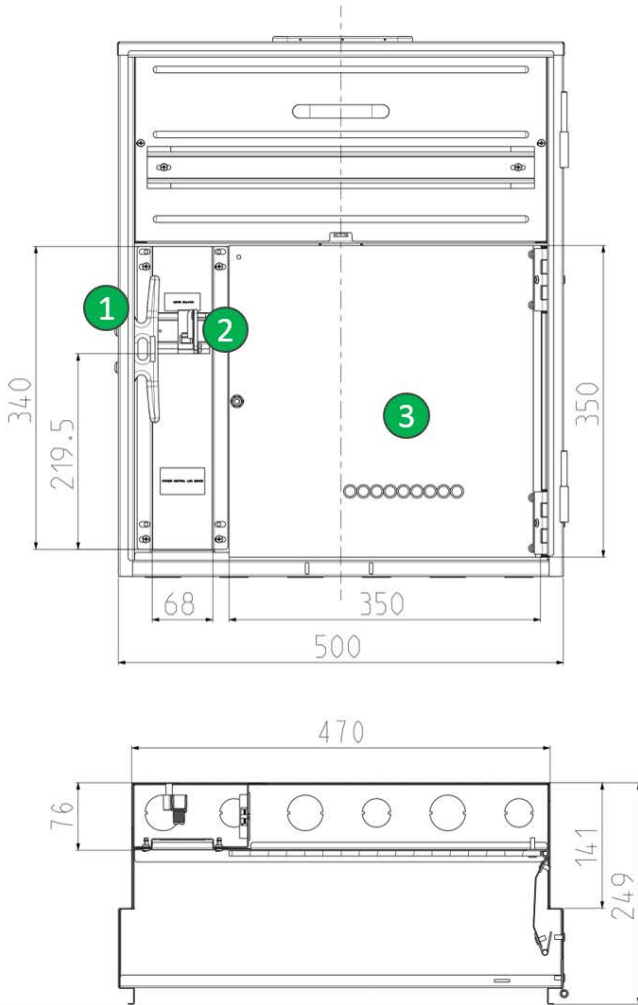

- 1** Lead tie-off point
- 2** One phase meter isolator (MCB 63A)
- 3** Meter panel

### Key features



Sliding bracket for temporary power leads



Earth & Neutral assembly bars



Door retaining strap

### Specifications

Standard Size					
Cat. No.	Length	Width	Depth	Meter panel dimensions	DIN capacity
230DRAS1MI	600 mm	500mm	260 mm (with door)	350W x 350H	24 poles

Schneider Electric  
33-37 Port Wakfield Road  
Gepps Cross, South Australia, 5085

National Customer Care Enquires  
**1300 2025 25**  
www.clipsal.com

Schneider Electric (Australia) Pty Ltd reserves the right to change specifications, modify designs and discontinue items without incurring obligation and whilst every effort is made to ensure that descriptions, specifications and other information in this document are correct, no warranty is given in respect thereof and the company shall not be liable for any error therein.

© 2015 Schneider Electric. All Rights Reserved.

Trademarks are owned by Schneider Electric Industries SAS or its affiliated companies.